


# ARDEX BRX 60 LO

## SACRIFICIAL ZINC ANODES FOR CATHODIC PROTECTION

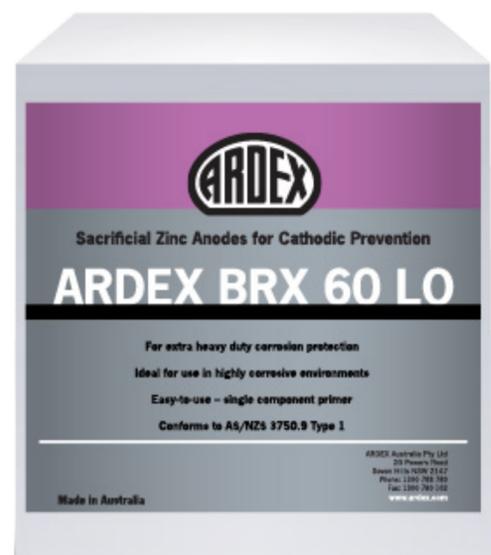

ARDEX BRX 60 LO Low Output Anodes are for use within concrete where repairs due to reinforcement corrosion are required. The anodes provide cathodic prevention to incipient anodes (halo effect) or corrosion control to limit corrosion rates of corroding bars embedded in original concrete. It is recommended for use in conjunction with the ARDEX BR Repair Mortar Range for ultimate corrosion prevention.

- For extra heavy duty corrosion protection
- Ideal for use in corrosive environments
- Simple, easy installation
- Cost-effective
- No wiring or external power source needed
- No risk of prestressing from over protection
- Does not require regular maintenance
- 60gm zinc with patented activation base
- Non-expansive
- Conforms to AS/NZS 3750.9 Type 1
- Pre-coated in activation paste

#### Typical Uses

- Columns, beams and slabs
- Balconies
- Precast and in-situ cast façades
- Pipes
- Foundations
- Wharf beams & soffits
- Car parks
- Retaining walls
- Tunnel linings

#### Size


- 125 x 50 x 25mm

#### Packaging

1 anode

#### Code

25304

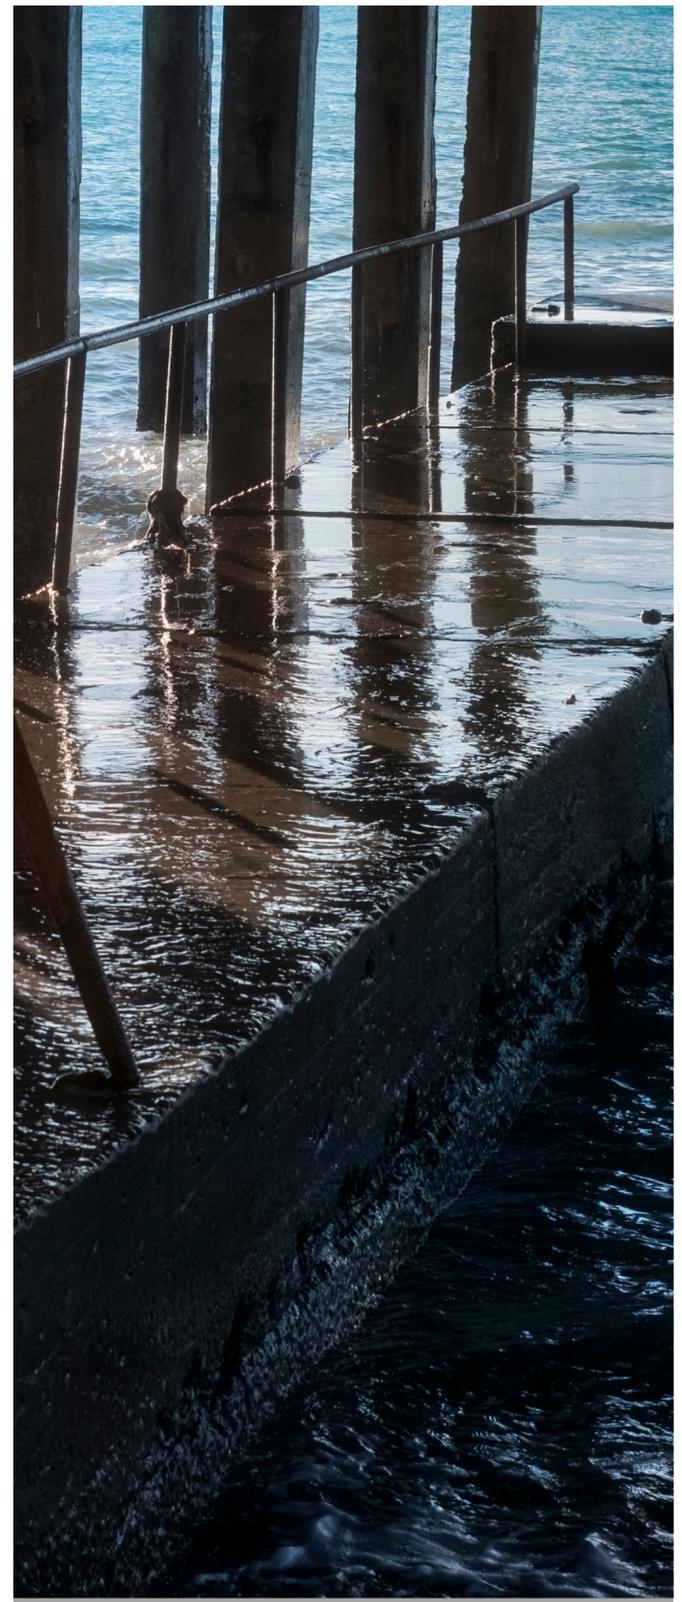

To find out more call 0800 227 339  
or visit [www.ardex.co.nz](http://www.ardex.co.nz)

